


Zero Velocity – Magnetic Hall Effect Sensors – 5/8 and 3/4 Threads


Round Body with Connector

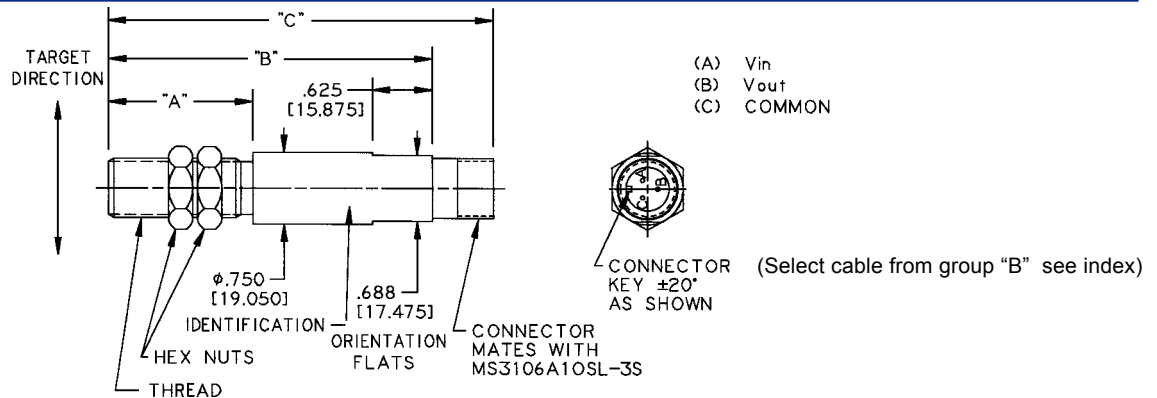

| Part Num. | Thread | "A" Dimension | "B" Dimension | "C" Dimension | Output |
|-----------|-----------------|-----------------|-----------------|-----------------|-----------------|
| H1512-005 | .625-18 UNF-2A | 1.500 (38.100) | 3.375 (85.725) | 4.012 (101.905) | TTL Compatible |
| H1522-005 | .625-18 UNF-2A | 1.500 (38.100) | 3.375 (85.725) | 4.012 (101.905) | Supply Tracking |
| H1512-006 | .625-18 UNF-2A | 2.750 (69.850) | 4.625 (117.475) | 5.262 (133.655) | TTL Compatible |
| H1522-006 | .625-18 UNF-2A | 2.750 (69.850) | 4.625 (117.475) | 5.262 (133.655) | Supply Tracking |
| H1512-007 | .625-18 UNF-2A | 4.000 (101.600) | 5.875 (149.225) | 6.512 (165.405) | TTL Compatible |
| H1522-007 | .625-18 UNF-2A | 4.000 (101.600) | 5.875 (149.225) | 6.512 (165.405) | Supply Tracking |
| H1612-005 | .750-20 UNEF-2A | 1.500 (38.100) | 3.375 (85.725) | 4.012 (101.905) | TTL Compatible |
| H1622-005 | .750-20 UNEF-2A | 1.500 (38.100) | 3.375 (85.725) | 4.012 (101.905) | Supply Tracking |
| H1612-006 | .750-20 UNEF-2A | 2.750 (69.850) | 4.625 (117.475) | 5.262 (133.655) | TTL Compatible |
| H1622-006 | .750-20 UNEF-2A | 2.750 (69.850) | 4.625 (117.475) | 5.262 (133.655) | Supply Tracking |
| H1612-007 | .750-20 UNEF-2A | 4.000 (101.600) | 5.875 (149.225) | 6.512 (165.405) | TTL Compatible |
| H1622-007 | .750-20 UNEF-2A | 4.000 (101.600) | 5.875 (149.225) | 6.512 (165.405) | Supply Tracking |

Net Weight: 7 oz. max.

Fully Threaded with Leads

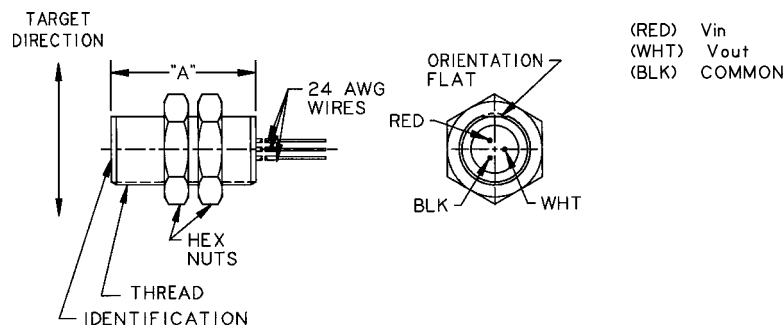

| Part Num. | Thread | "A" Dimension | Lead Length | Output |
|-----------|-----------------|----------------|-------------|-----------------|
| H1512-009 | .625-18 UNF-2A | 1.500 (38.100) | 12 (304) | TTL Compatible |
| H1522-009 | .625-18 UNF-2A | 1.500 (38.100) | 12 (304) | Supply Tracking |
| H1512-010 | .625-18 UNF-2A | 2.750 (69.850) | 12 (304) | TTL Compatible |
| H1522-010 | .625-18 UNF-2A | 2.750 (69.850) | 12 (304) | Supply Tracking |
| H1612-009 | .750-20 UNEF-2A | 1.500 (38.100) | 12 (304) | TTL Compatible |
| H1622-009 | .750-20 UNEF-2A | 1.500 (38.100) | 12 (304) | Supply Tracking |
| H1612-010 | .750-20 UNEF-2A | 2.750 (69.850) | 12 (304) | TTL Compatible |
| H1622-010 | .750-20 UNEF-2A | 2.750 (69.850) | 12 (304) | Supply Tracking |

Net Weight: 3 oz. max.

Dimensions in inches and (mm).