



Zero Velocity – Magnetic Hall Effect Sensors – 5/8 and 3/4 Threads

UL/CSA Explosion Proof Sensors

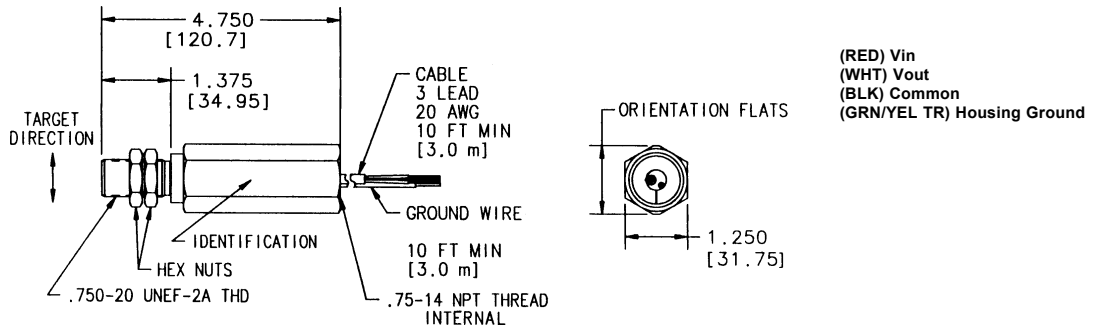

Part Num.	Thread	Thread Length	Overall Length	Cable Length	Output
H1612-025	.750-20 UNEF-2A	1.375 (34.92)	4.750 (120.65)	10 ft. (3.0 m)	TTL Compatible


Rating: UL & CSA listed for hazardous locations. Class I, Div.1, Groups A, B, C & D; Class II, Div. 1, Groups E, F & G. Temp. Code T4A. Connect only to NEC Class 2 circuits.
Net Weight: 23 oz. max.

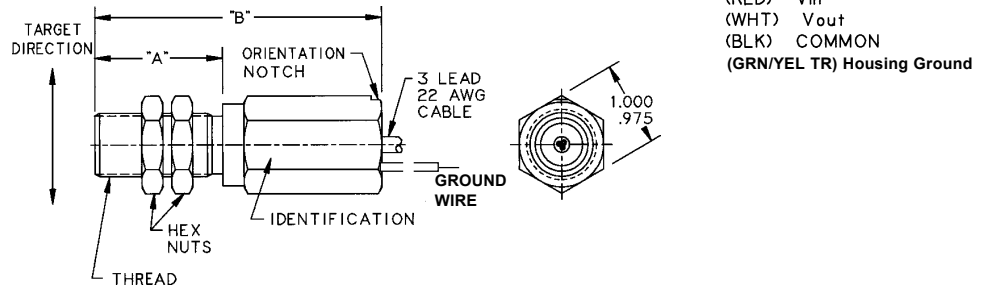


Part Num.	Thread	"A" Dimension	"B" Dimension	Cable Length	Output
H1512-026	.625-18 UNF-2A	1.500 (38.100)	3.375 (85.725)	10 ft (3.05m)	TTL Compatible
H1522-026	.625-18 UNF-2A	1.500 (38.100)	3.375 (85.725)	10 ft (3.05m)	Supply Tracking
H1512-027	.625-18 UNF-2A	2.750 (69.850)	4.625 (117.475)	10 ft (3.05m)	TTL Compatible
H1522-027	.625-18 UNF-2A	2.750 (69.850)	4.625 (117.475)	10 ft (3.05m)	Supply Tracking
H1612-026	.750-20 UNEF-2A	1.500 (38.100)	3.375 (85.725)	10 ft (3.05m)	TTL Compatible
H1622-026	.750-20 UNEF-2A	1.500 (38.100)	3.375 (85.725)	10 ft (3.05m)	Supply Tracking
H1612-027	.750-20 UNEF-2A	2.750 (69.850)	4.625 (117.475)	10 ft (3.05m)	TTL Compatible
H1622-027	.750-20 UNEF-2A	2.750 (69.850)	4.625 (117.475)	10 ft (3.05m)	Supply Tracking

Rating: UL & CSA listed for hazardous locations. Class I, Div.1, Groups A, B, C & D; Class II, Div. 1, Groups E, F & G. Temp. Code T4A. Connect only to NEC Class 2 circuits.
Net Weight: 9 oz. max.

TTL Compatible

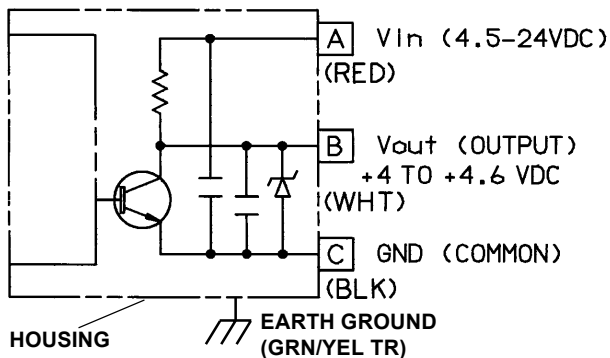

Supply Tracking

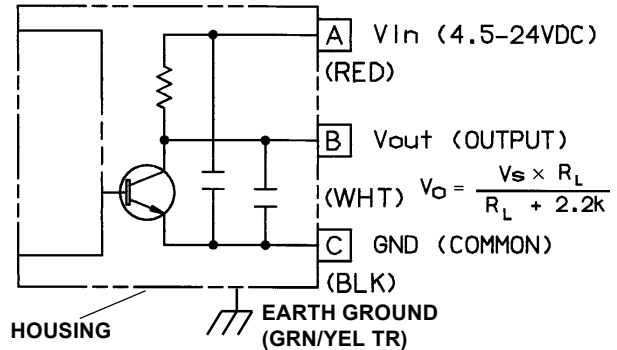

Dimensions in inches and (mm).